

## Plug - with MULTI-GRIP cable gland



| Product description       |                        |
|---------------------------|------------------------|
| BALS-Prd.-Nr              | 203                    |
| EAN                       | 4024941348515          |
| Product category          | Plug INNOLINQ          |
| Current                   | 16A                    |
| Number of poles           | 5p                     |
| Poles                     | 3p+N+PE                |
| Position of earth contact | 6 h                    |
| Voltage                   | 200/346 up to 240/415V |
| Frequency                 | 50 and 60Hz            |


| Product description    |                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------|
| Protection degree      | IP54                                                                                       |
| Colour code            | red RAL 3000                                                                               |
| Colour of appliance    | Collar red RAL 3000, Cable gland dark grey RAL 7012, Housing cover dark grey RAL 7012      |
| Connection design      | with screw terminal                                                                        |
| Maximum conductor size | 2,5 qmm                                                                                    |
| Cable entry            | Cable gland                                                                                |
| Height                 | 160mm                                                                                      |
| Width                  | 71mm                                                                                       |
| Depth                  | 78mm                                                                                       |
| Material of enclosure  | Polyamide                                                                                  |
| Contact                | The contacts are brass, The contact carrier is made of high temperature resistant material |

| Additional technical information |                                                                                                                                                                |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | Multi-Grip cable gland with gasket and integrated strain relief, Screwless housing connection with snap fastening, For cable diameter from 10 up to max. 21 mm |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.194 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941348515    |

## Logistics data

|        |            |
|--------|------------|
| Length | 78 mm      |
| Width  | 71 mm      |
| Height | 160 mm     |
| Weight | 0.195 kg   |
| Volume | 886.08 ccm |

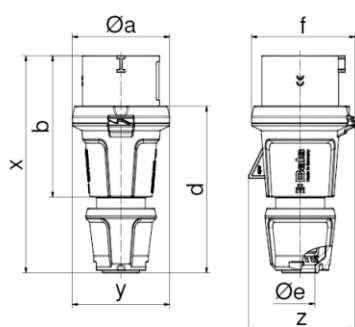

| Ampere<br>Polzahl | 16<br>3 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |
|-------------------|---------|---------|---------|---------|---------|
| Ø a               | 59,0    | 71,0    | 80,0    | 80,0    | 80,0    |
| b                 | 94,0    | 103,0   | 124,0   | 124,0   | 124,0   |
| d                 | 109,0   | 123,0   | 145,0   | 145,0   | 145,0   |
| Ø e               | 18,0    | 21,0    | 29,0    | 29,0    | 29,0    |
| f                 | 63,0    | 76,0    | 85,0    | 85,0    | 85,0    |
| x                 | 145,0   | 160,0   | 191,0   | 191,0   | 191,0   |
| y                 | 59,0    | 71,0    | 80,0    | 80,0    | 80,0    |
| z                 | 64,0    | 78,0    | 85,0    | 85,0    | 89,0    |
| Cond. mm² min     | 1       | 1       | 2,5     | 2,5     | 2,5     |
| Cond. mm² max     | 2,5     | 2,5     | 6,0     | 6,0     | 6,0     |

